



COMMERCIAL
CONTROL
VALVES

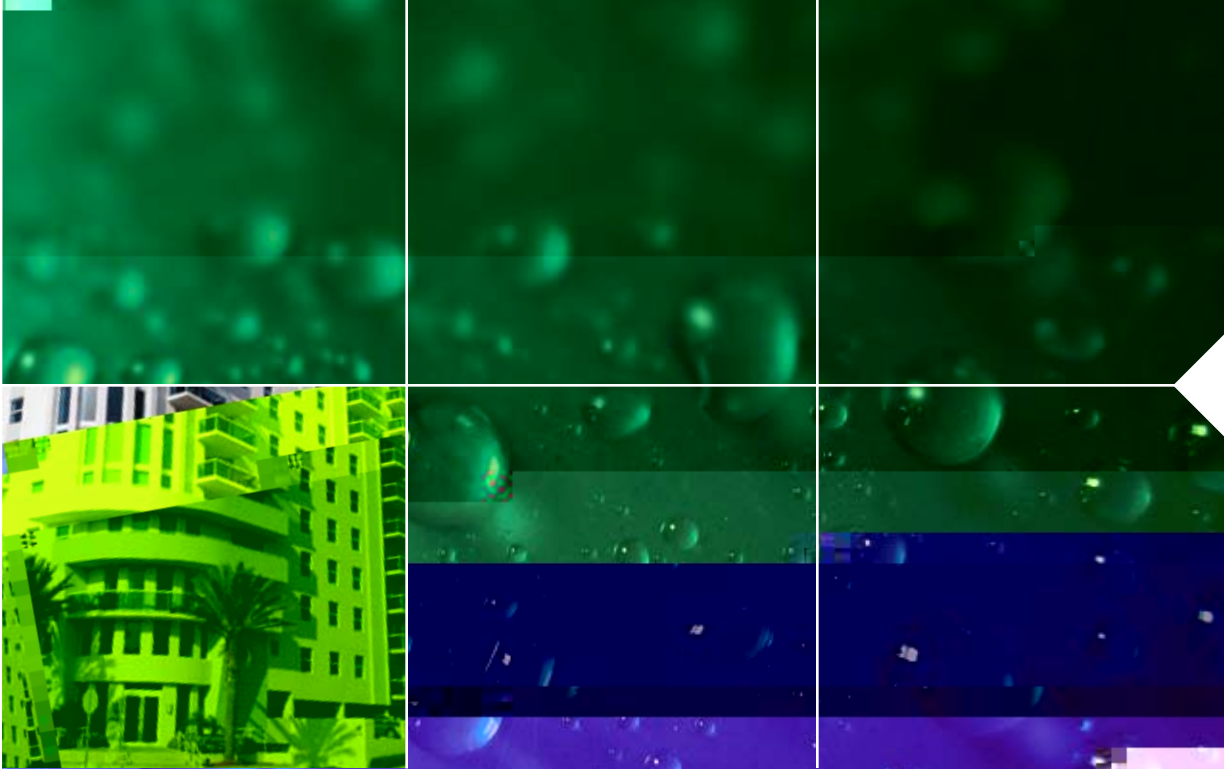

Ma C Va

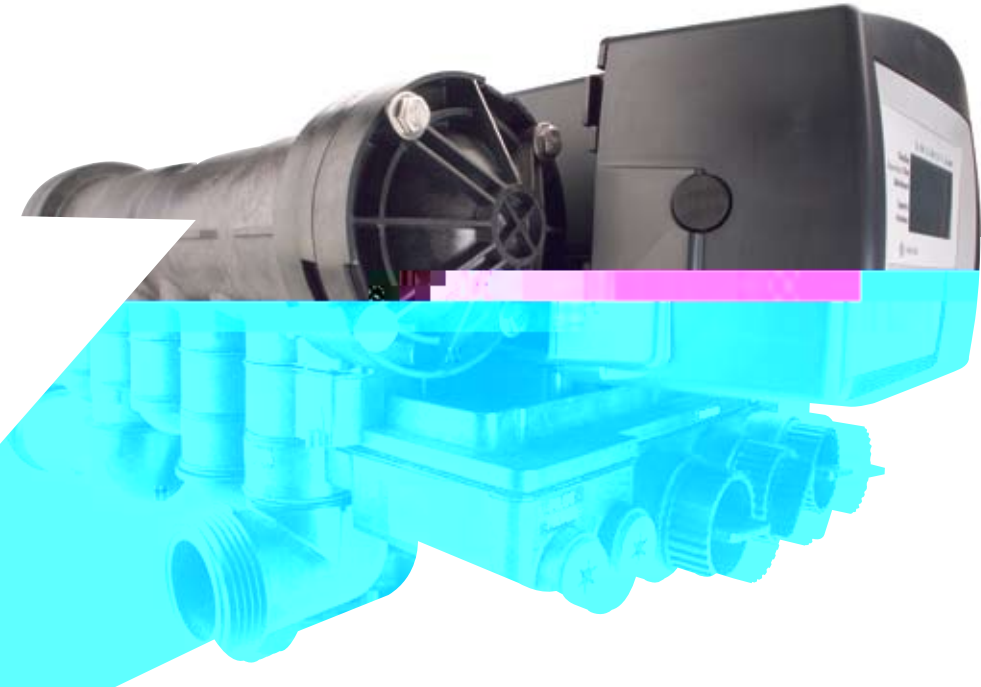

Control Valve

The Pentair Water® Magnum Control Valve is one of the most versatile valves on the market.

Logix Series

- All-electronic control platform
- 24-hour super-capacitor backup – no battery necessary
- Remote mount kit allows programming module to be installed up to 40 feet away
- Universal controller – works on all Autotrol® brand valves
- Automatic capacity calculations – no math or salt tables necessary
- 12-volt operation

The Logix series offers the ultimate in control for the Magnum® valve. Simple 3-step programming and installation makes this electronic controller the industry leader.



742 D

- Simple, economic electronic time clock (chronometric)
- 7- or 99-day regeneration settings
- Filter or conditioner setting in one control
- Fully programmable cycle times
- Salt setting in 1-pound increments (lbs/cu ft)
- Single controller operates Autotrol 255, 263, 268, 278 models, and Pentair Water Magnum and Magnum IT with one controller

762 D

- Simple, economic electronic demand (volumetric)
- Calendar override – 99 day
- 28-day variable reserve
- Filter or conditioner setting in one controller
- Automatic capacity calculations
- Fully programmable cycle times
- Salt setting in 1-pound increments (lbs/cu ft)
- Operates 255, 263, 268, 278, and Magnum IT with one controller

764 D

Salinity Control 762

- Multi-tank applications (twin alternating, multi-tank parallel)
- Control lockout
- Remote regeneration

Flow Rates (GPM)

Service @ 15 psi (1.03 bar) drop	76 gpm (17.3 m ³ /hr)
Backwash @ 25 psi (1.72 bar) drop	89 gpm (20.2 m ³ /hr)
Service	Cv = 19.5 (Kv = 17)
Backwash	Cv = 17.8 (Kv = 19.9)

Connections / Dimensions

Tank Thread	4-inch 8 UN
Inlet/Outlet	2-inch: connections NPT or BSPT, Female, CPVC
Brine Line	3/4-inch NPT
Drain Line*	1-1/2-inch: connections for NPT or BSPT, Female, CPVC
Riser Tube Diameter	1-1/2-inch
Riser Installation	Above top of tank 5/8-inch (±1/8-inch)
Pilot Drain and Auxiliary Hydraulic Output	1/4-inch tube fitting

*Valve installed drain flow controls available (5 – 40 gpm). If higher backwash flow is needed, an external flow control will be required.

Details / Materials


Valve Body	Thermoplastic
O-rings	EPDM
Injector	7 sizes available: 14, 16, 18, 21, 24, 30, 36
Working Pressure	25 psi – 100 psi (1.72 bar – 6.9 bar)
Water Temperature	35° – 100°F (2° – 38°C), 120°F (49°C) Ambient




Top Mount or Side Mount Configuration




Injector 1000441
For 14-inch Tanks

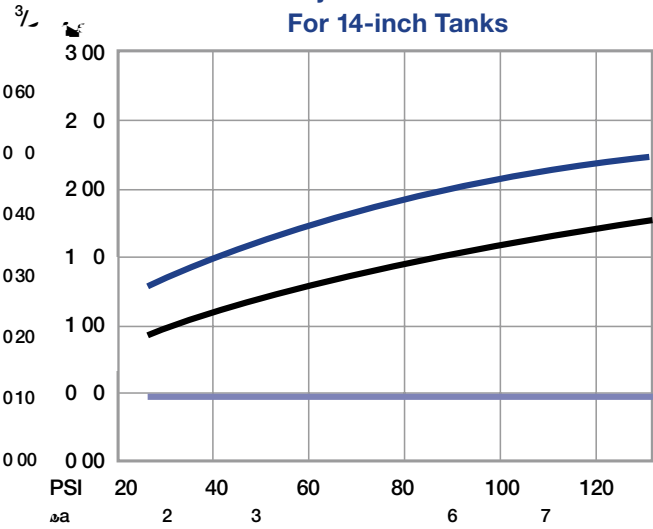


Injector 1000442
For 16-inch Tanks



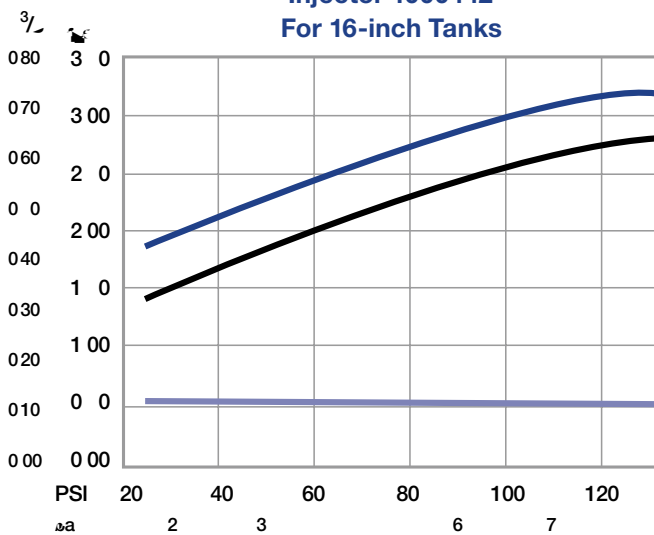


Injector 1000443
For 18-inch Tanks

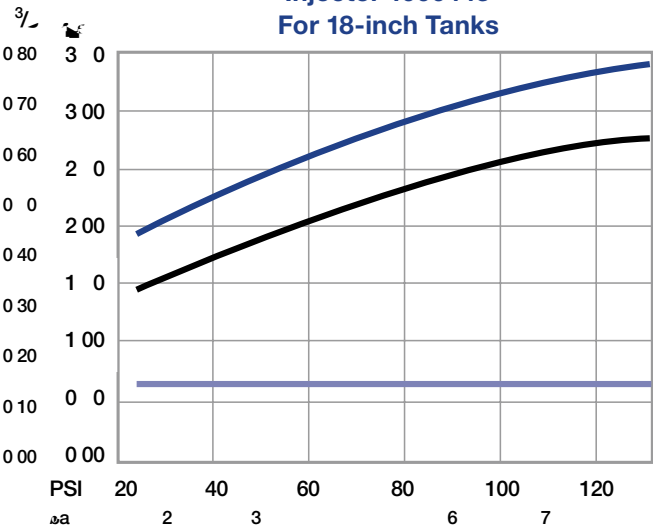


Injector 1000444
For 21-inch Tanks

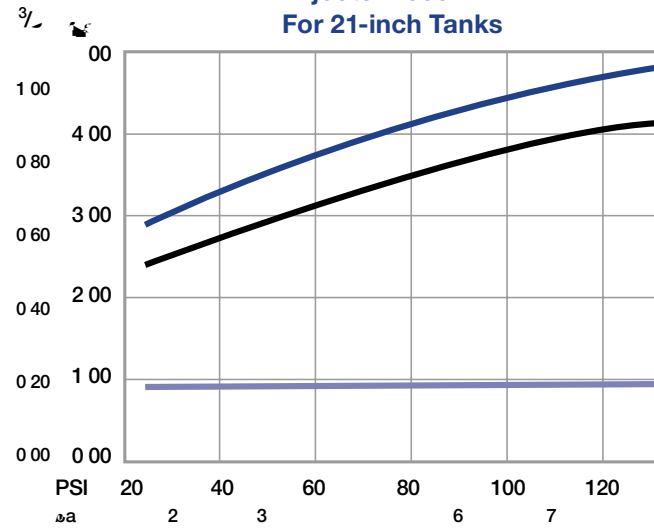

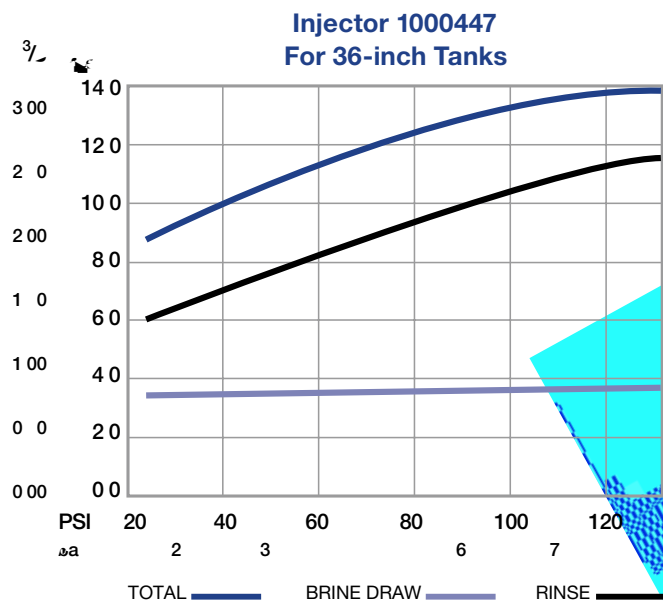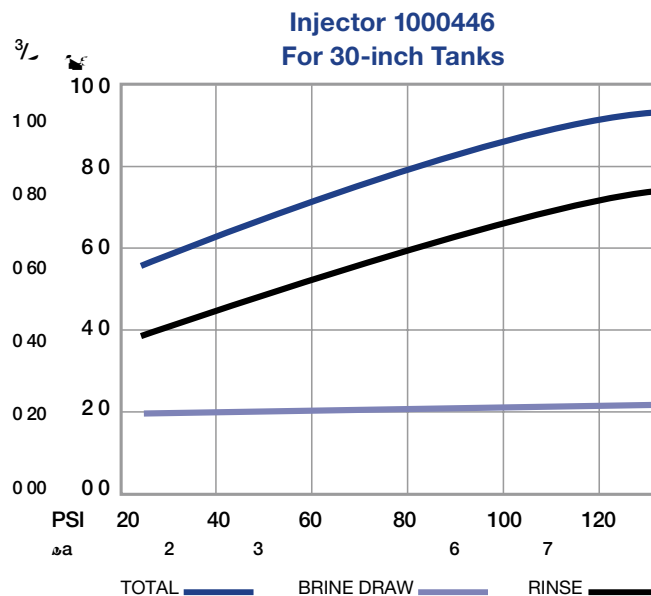
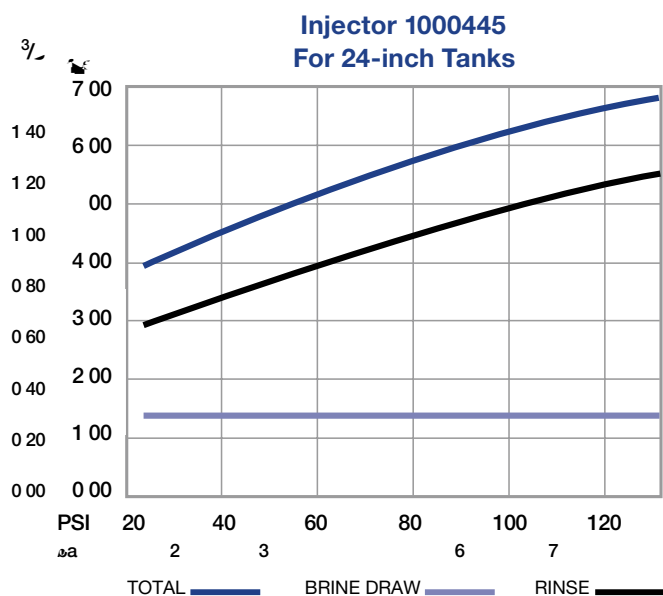


NOTE: Brine draw and rinse rates on empty tank.

1-1/2" C

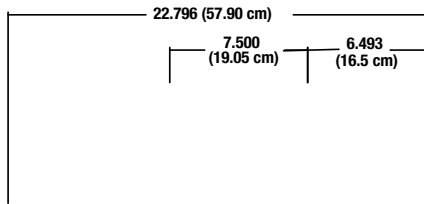

2" I

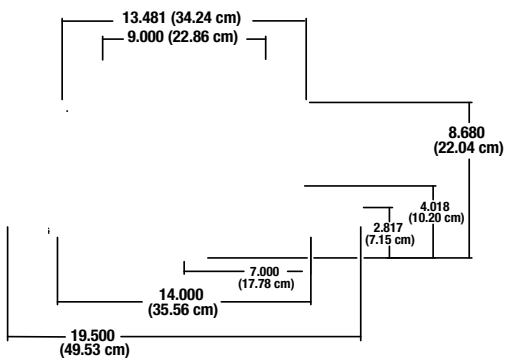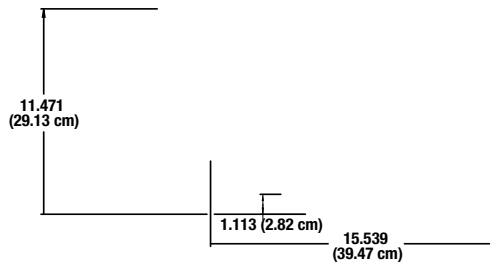



2080 E. ... A ...
B ... WI 304
T 262 784 4490
Fa 262 784 7794

730 N ... G. Pa R a
M a ... WI 3209
T 262 238 4400
Fa 262 238 4402

2010 P a R ... a F a ... LLC
1017972 R ... FFE10

C ... Ca. 800 279 9404

... a a ... a